



<http://wiki.homerecz.com>

..... 1

..... 1

..... 1

..... 1

..... 1

(GENELEC+) 5

..... 5

..... 5

..... 5

..... 5

Frequency Response 6

..... 6

Group Delay 7

RT60 8

Clarity 8

Decay 9

Waterfall 9

Spectrogram 10

THD+N 10

..... 12

..... 12

..... 12

..... 12

(GENELEC+

)



- (GENELEC) + 2.1 (가)
- 110Hz ()
- 3kHz ()
- MaxSPL : 103dBSPL
- MaxSPL : 104dBSPL
- Frequency Range : 58Hz~20kHz(±3dB)
- Frequency Range : 30Hz-200Hz
- (diffuse field)
-

Crossover Frequency	3.0 kHz
LF Amplifier	50W, Class D
HF Amplifier	30W, Class D
Maximum SPL	103 dB


Driver Type:	Glass Composite cone
Total Power :	100W RMS, 200W Peak
Frequency Range:	30Hz-200Hz
Maximum Peak SPL:	104dB SPL @ 1m

Frequency Response

10 Point

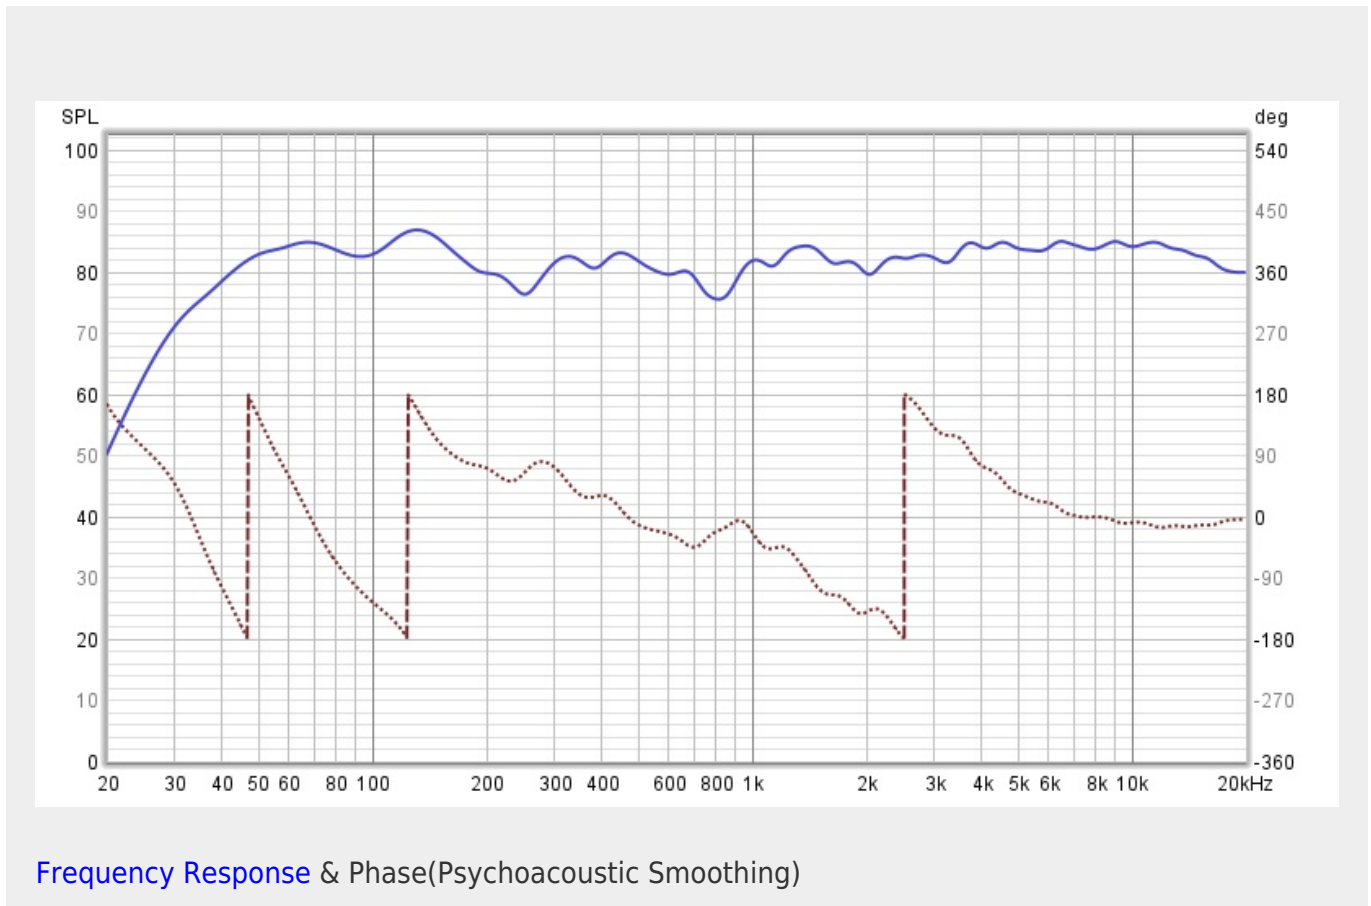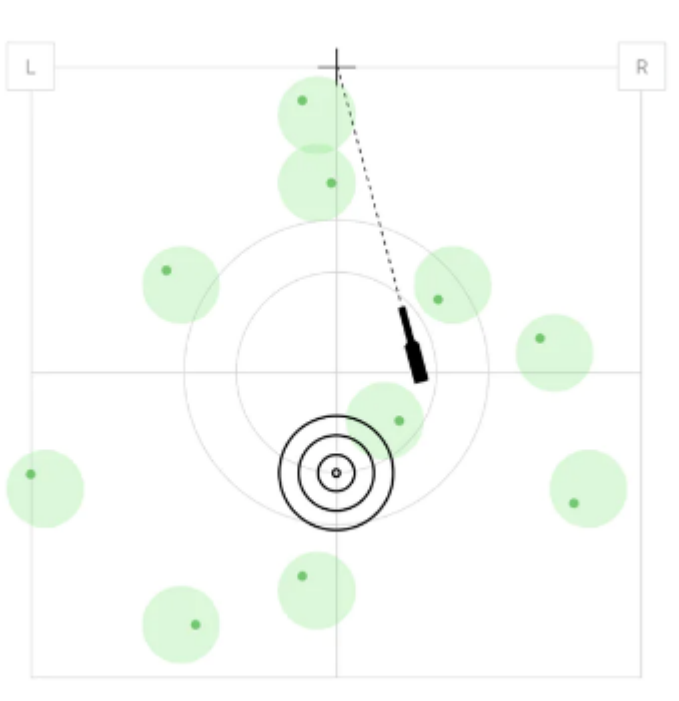


Frequency Response & Phase(Psychoacoustic Smoothing)

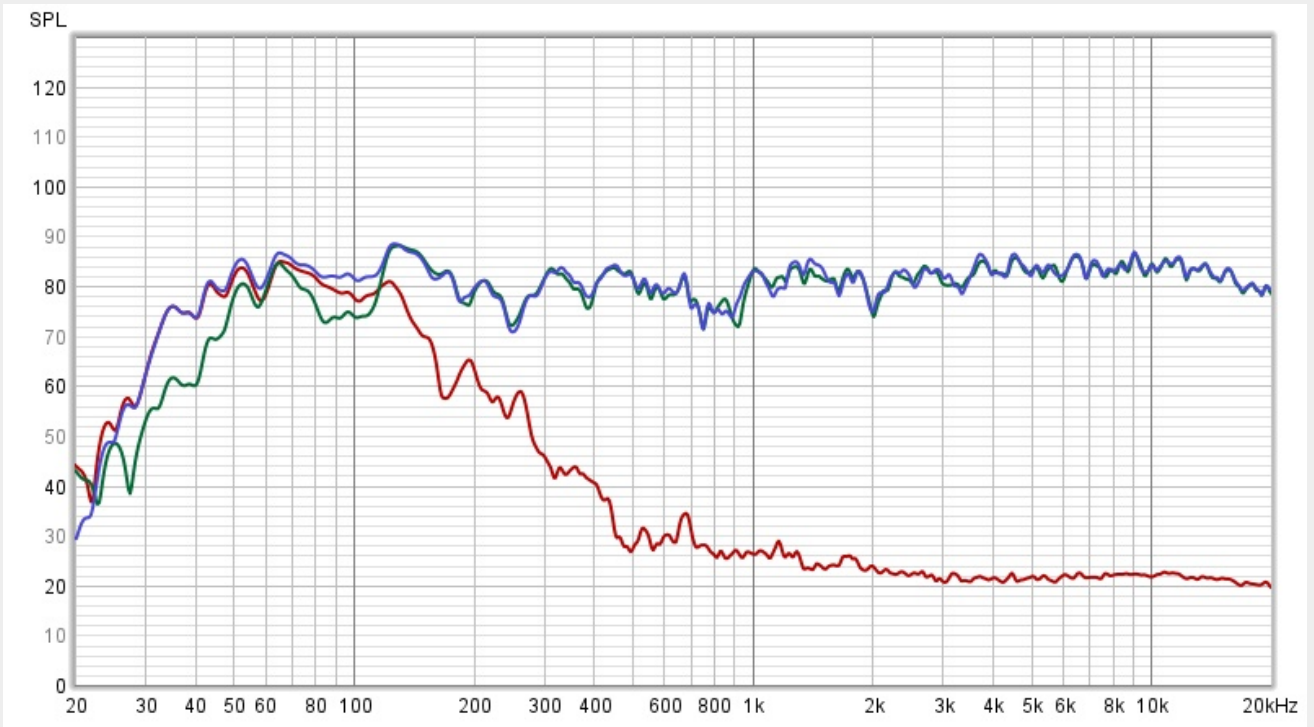


ALL SPL(1/24 Octave Smoothing)

- : Main
- : Sub woofer
- : All system


Group Delay

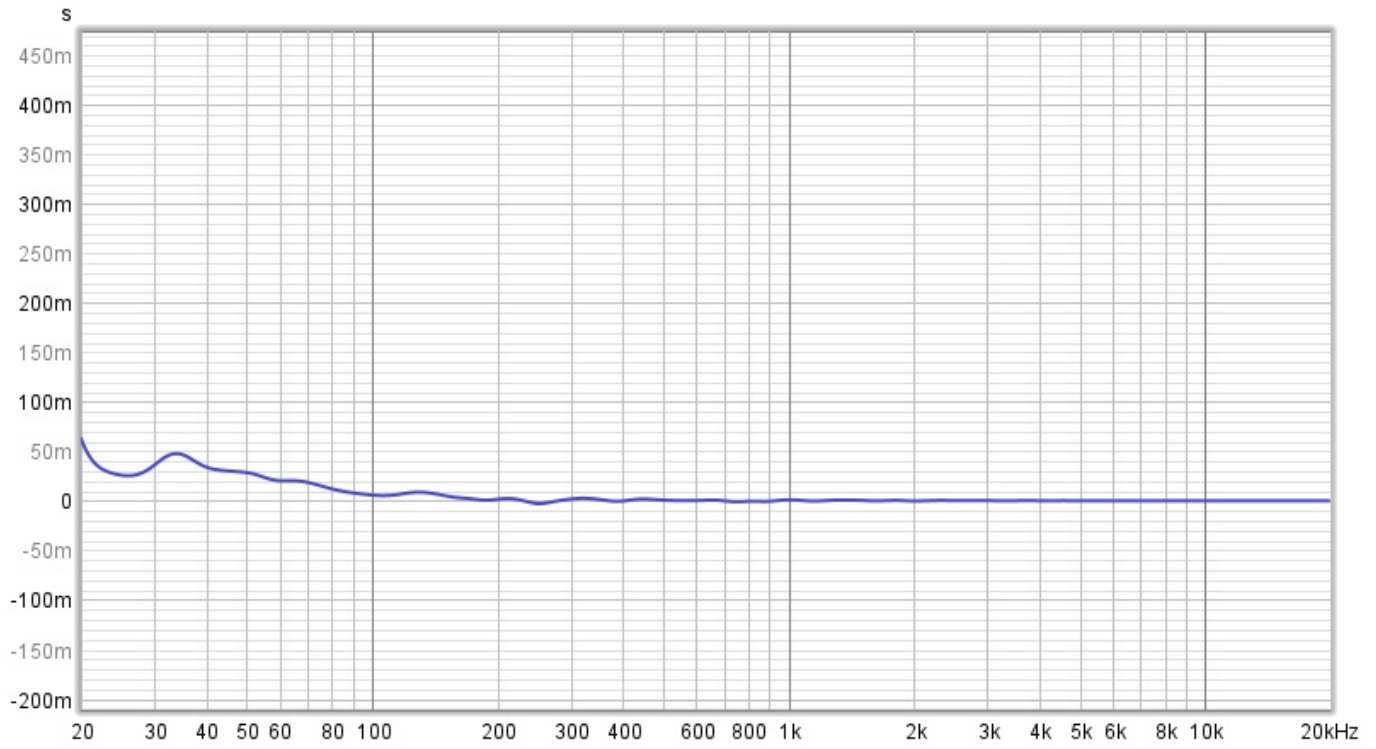


RT60

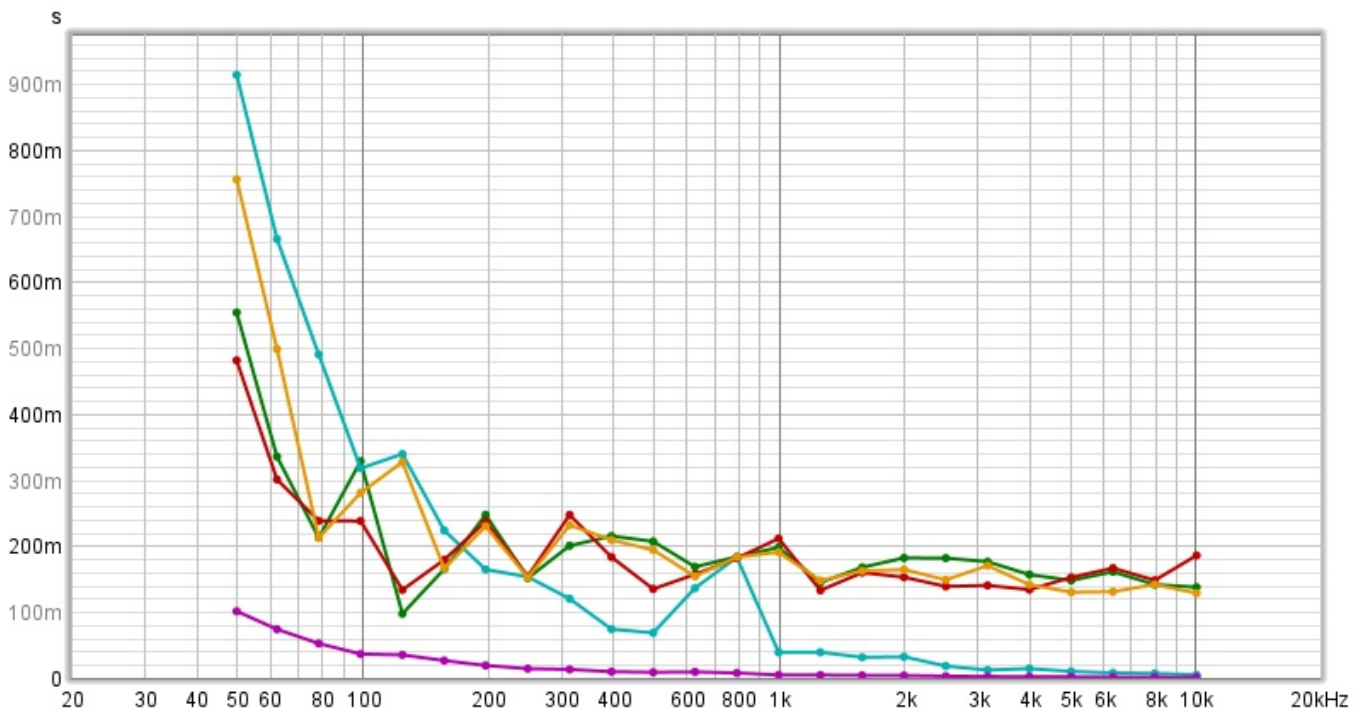


Clarity

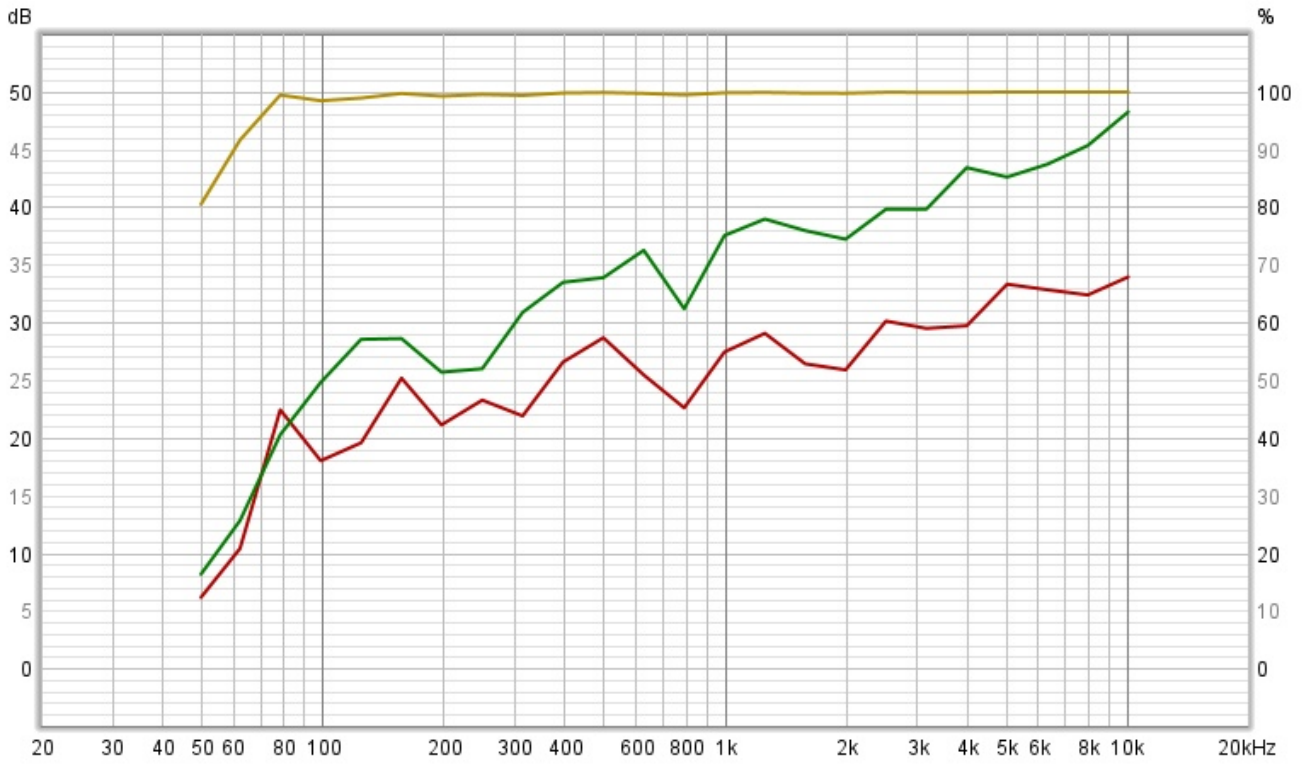


Decay

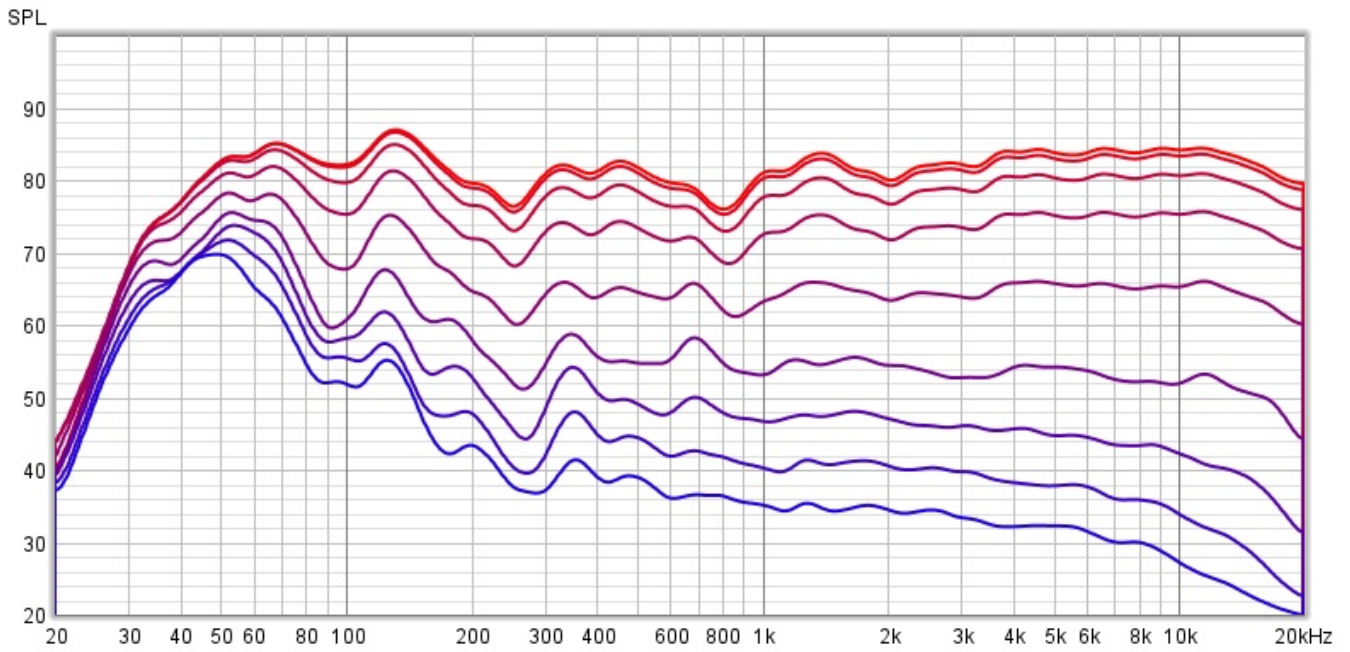

Waterfall


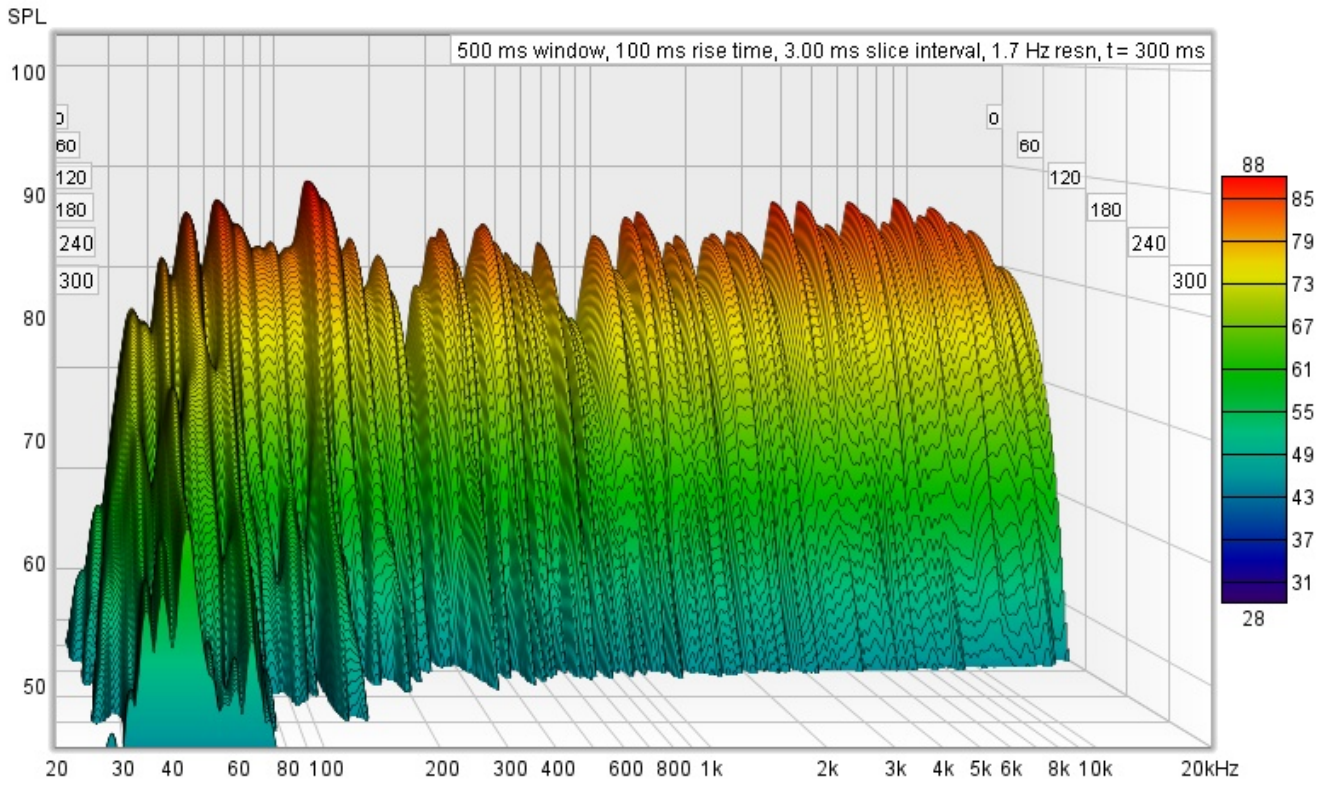



Spectrogram

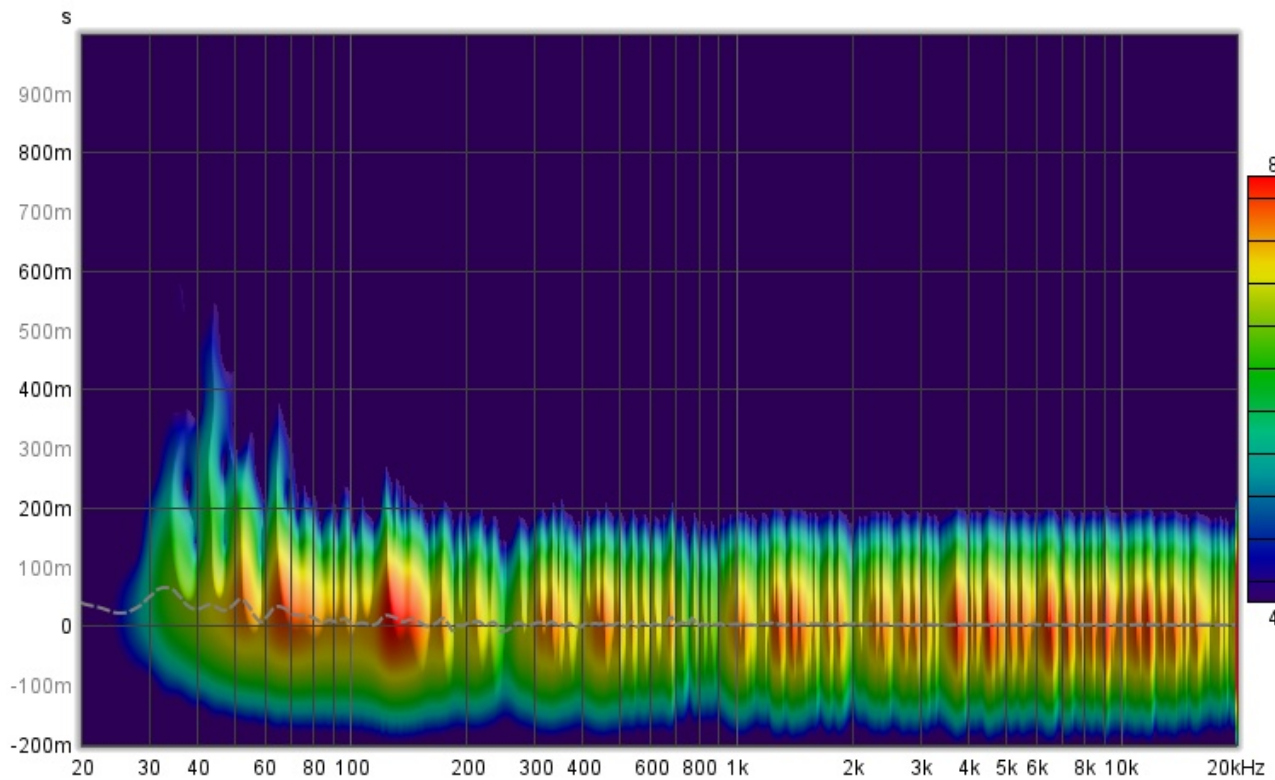

THD+N

- : THD
- :

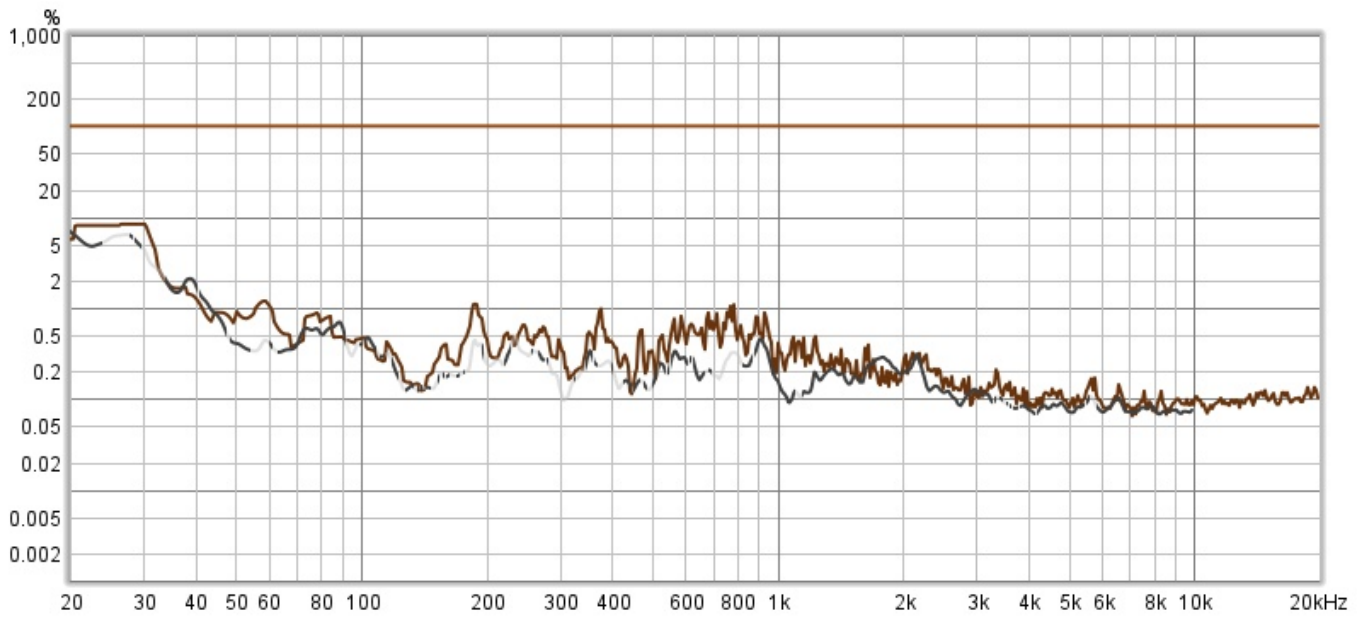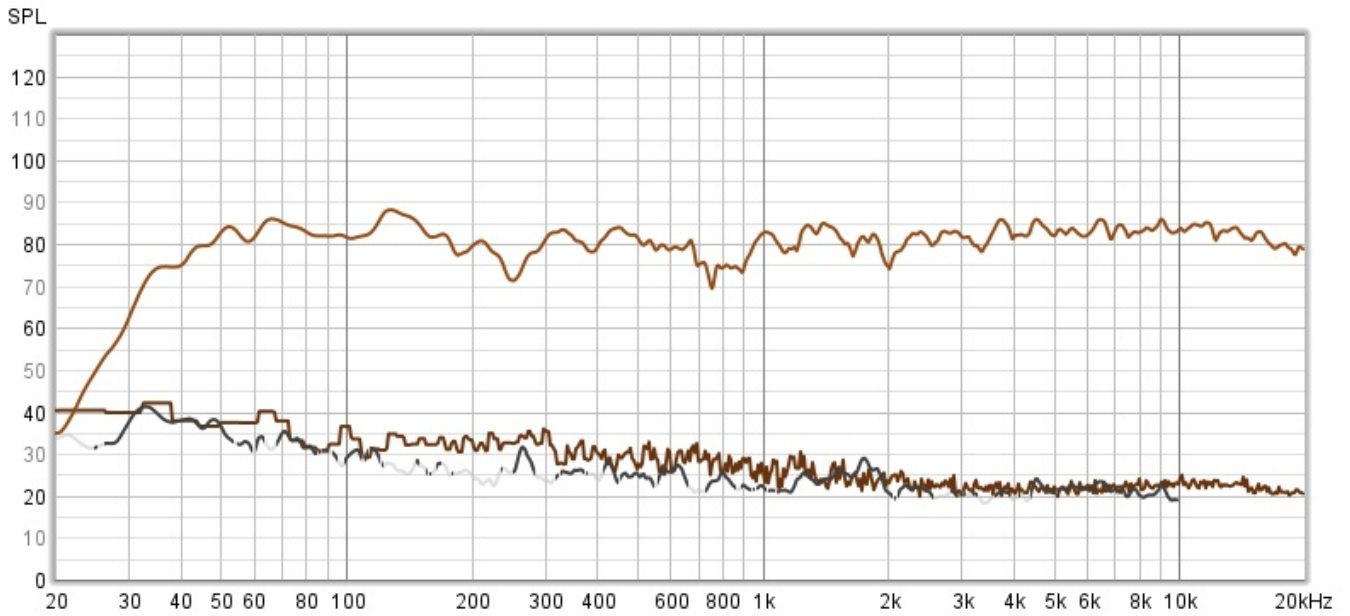



<http://wiki.homerecz.com>

From:
<https://wiki.homerecz.com/> -

Last update: **2024/12/29**

: (admin@homerecz.com)