



<http://wiki.homerecz.com>



..... 1

..... 1

..... 1

..... 1

..... 1

..... 5

..... 5

..... 5

..... 5

..... 6

..... 6

..... 7

..... 8

..... 8

..... 9

..... 9

..... 10

..... 10

..... 12

..... 12

..... 12

..... 12



# (GENELEC+

)



- (GENELEC) + 2.1 ( 가 )
- 110Hz ( )
- 3kHz ( )
- MaxSPL : 103dB SPL
- MaxSPL : 104dB SPL
- Frequency Range : 58Hz~20kHz(±3dB)
- Frequency Range : 30Hz-200Hz
- (diffuse field)
- 

Crossover Frequency	3.0 kHz
LF Amplifier	50W, Class D
HF Amplifier	30W, Class D
Maximum SPL	103 dB


Driver Type:	Glass Composite cone
Total Power :	100W RMS, 200W Peak
Frequency Range:	30Hz-200Hz
Maximum Peak SPL:	104dB SPL @ 1m

# Frequency Response

10 Point

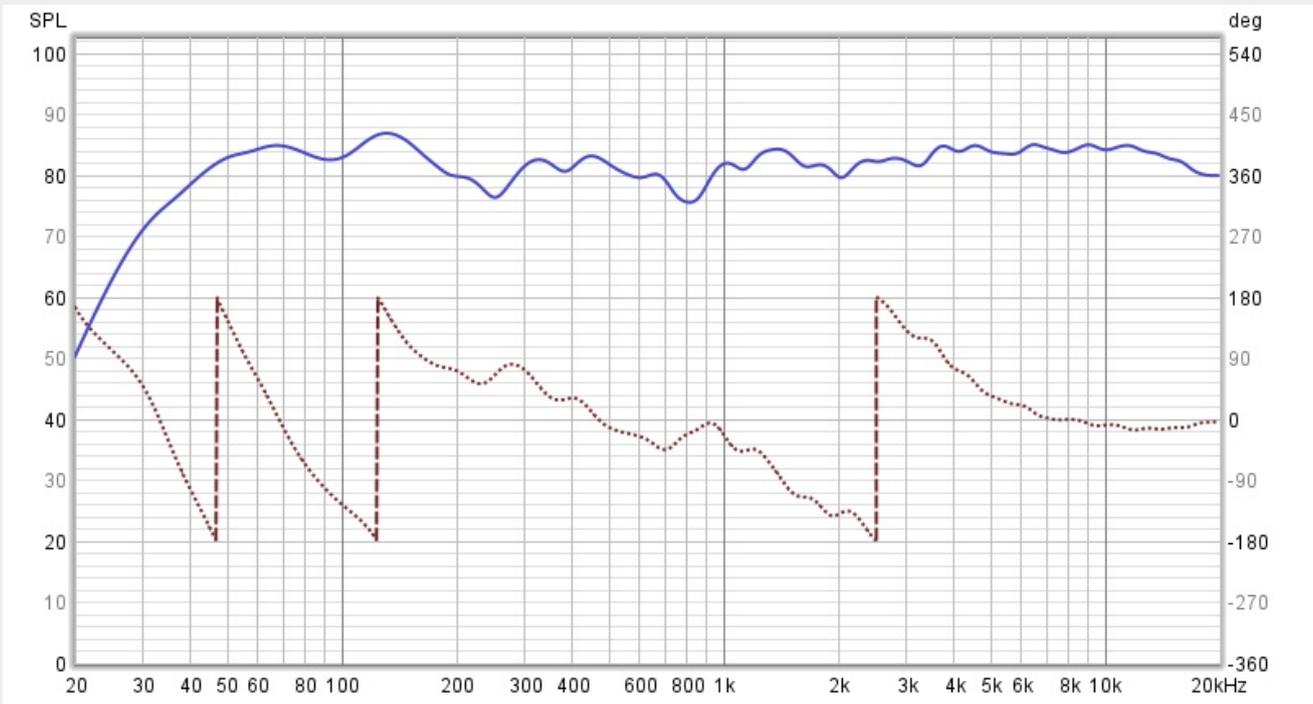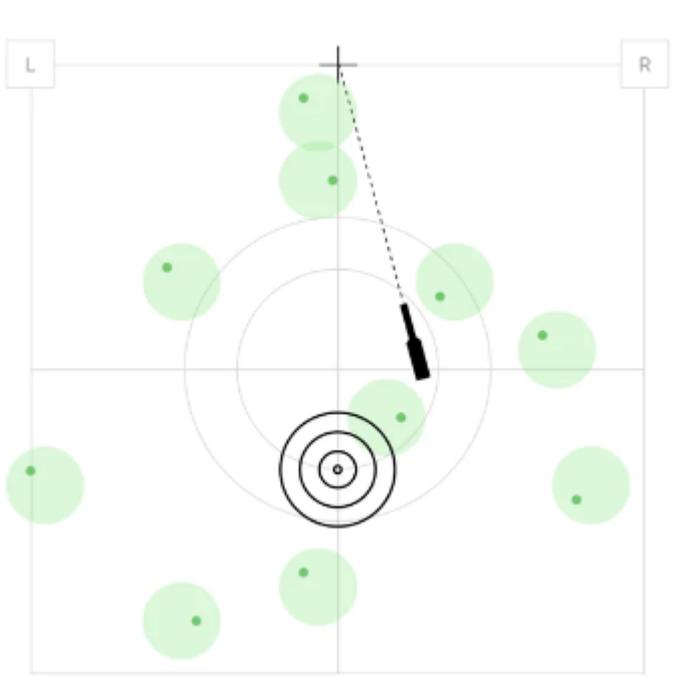


Frequency Response & Phase(Psychoacoustic Smoothing)

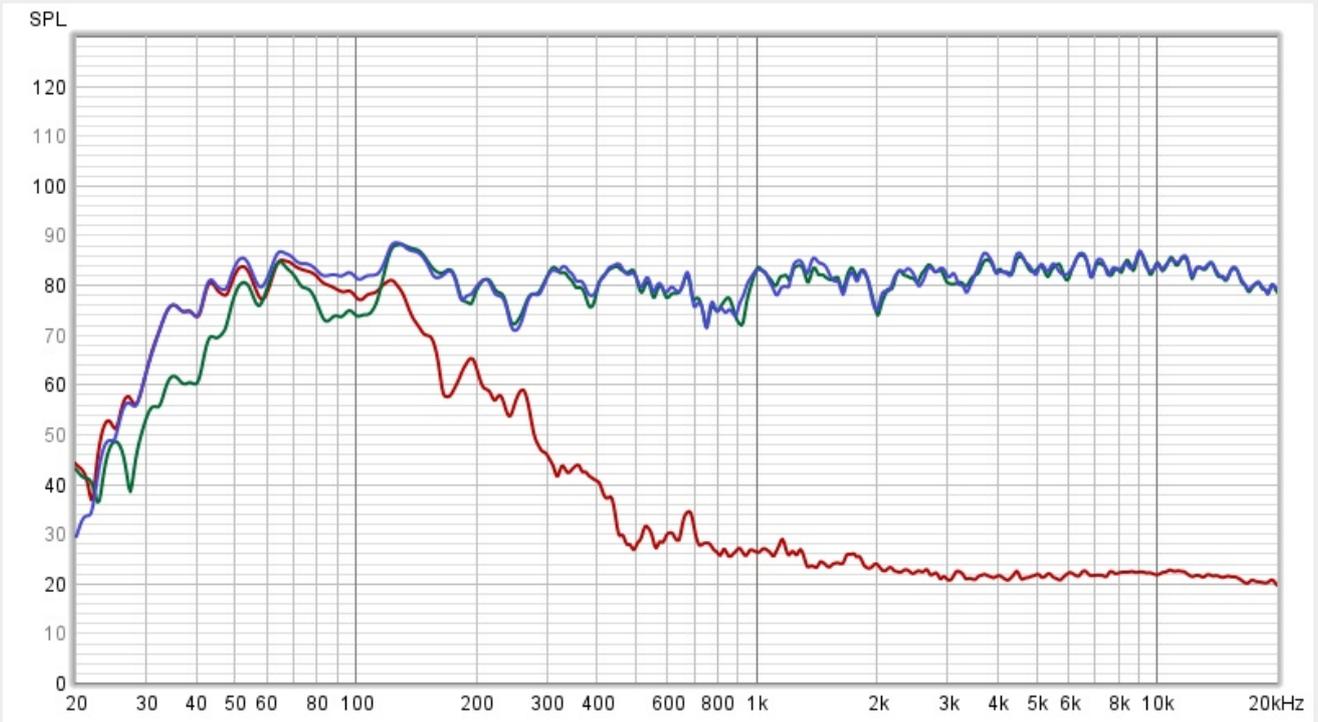


ALL SPL(1/24 Octave Smoothing)

- : Main
- : Sub woofer
- : All system


## Group Delay

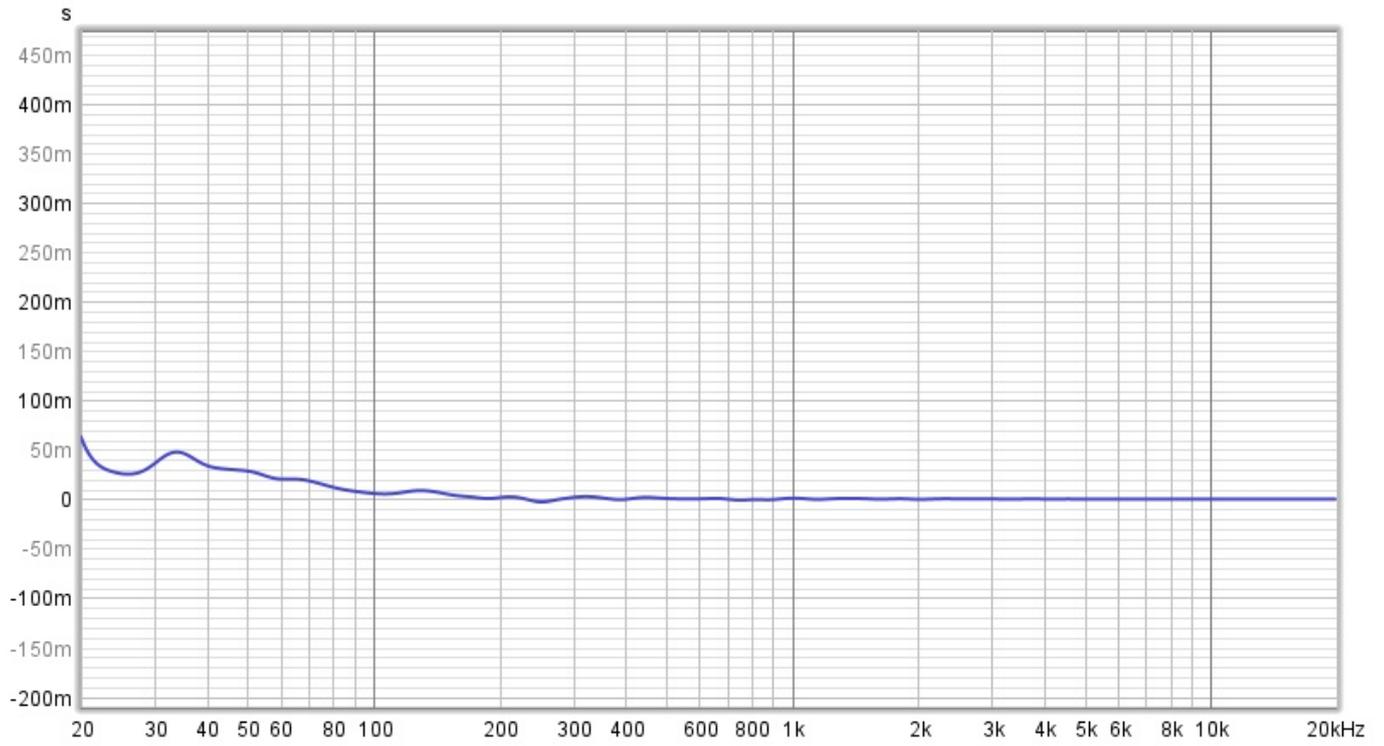


## RT60

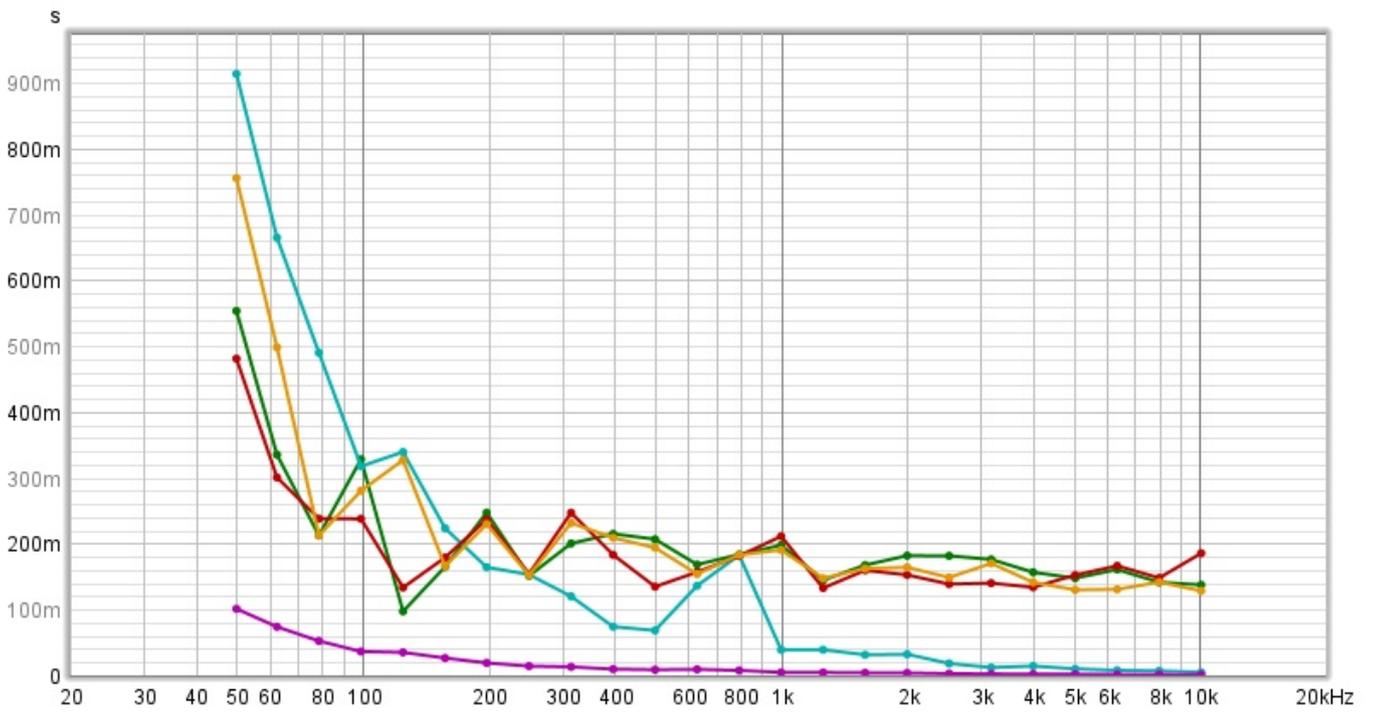


## Clarity

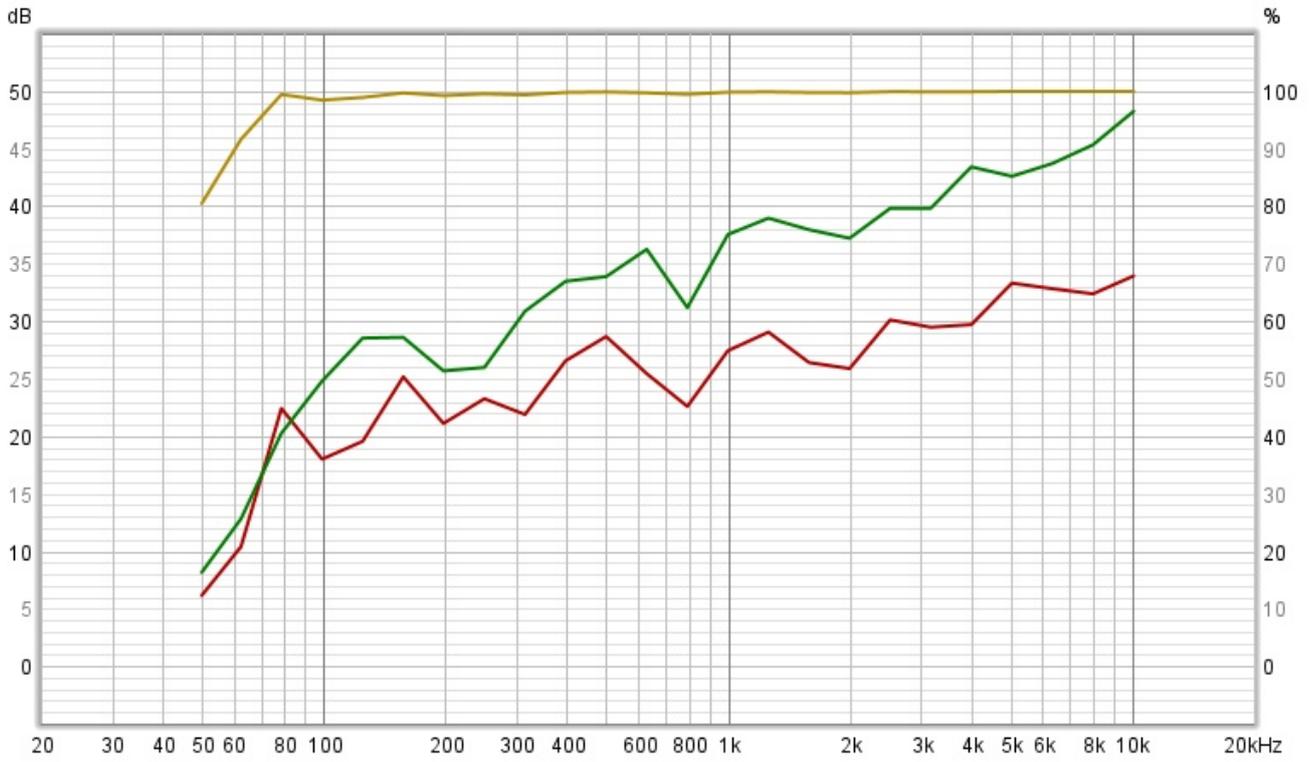


## Decay

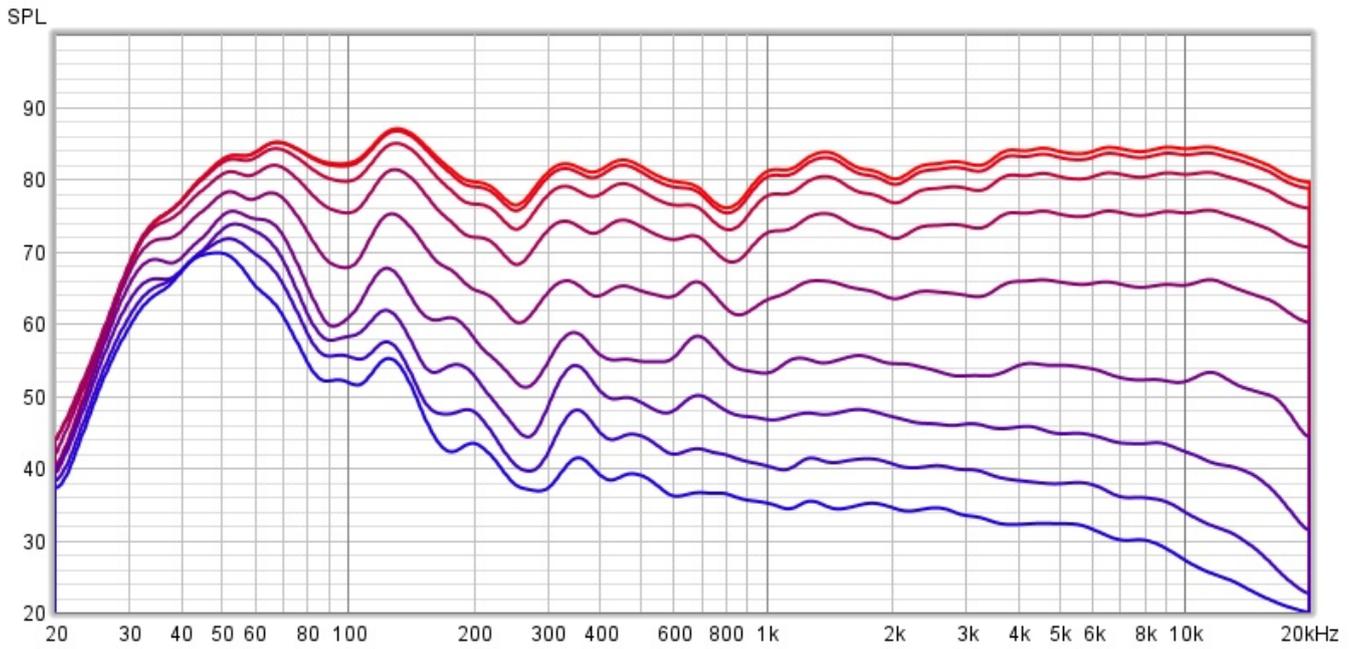

## Waterfall


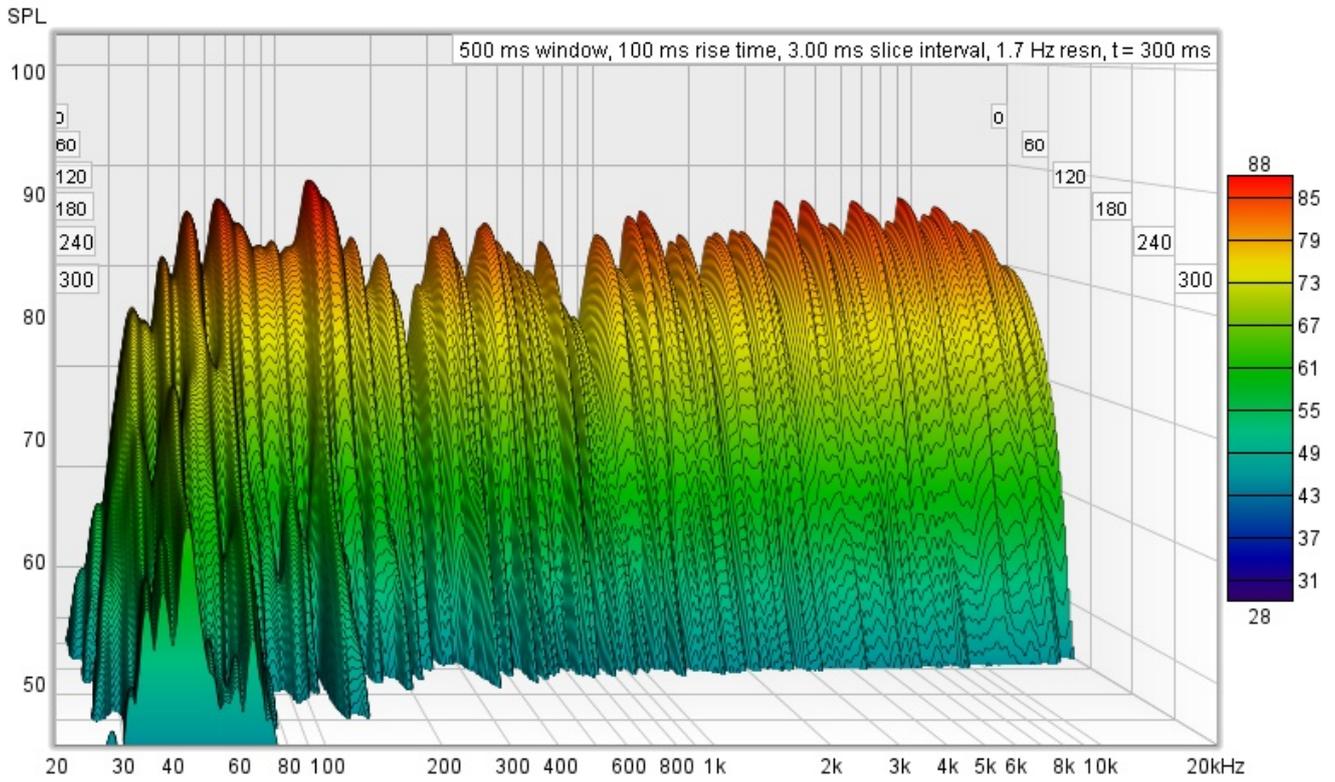



## Spectrogram

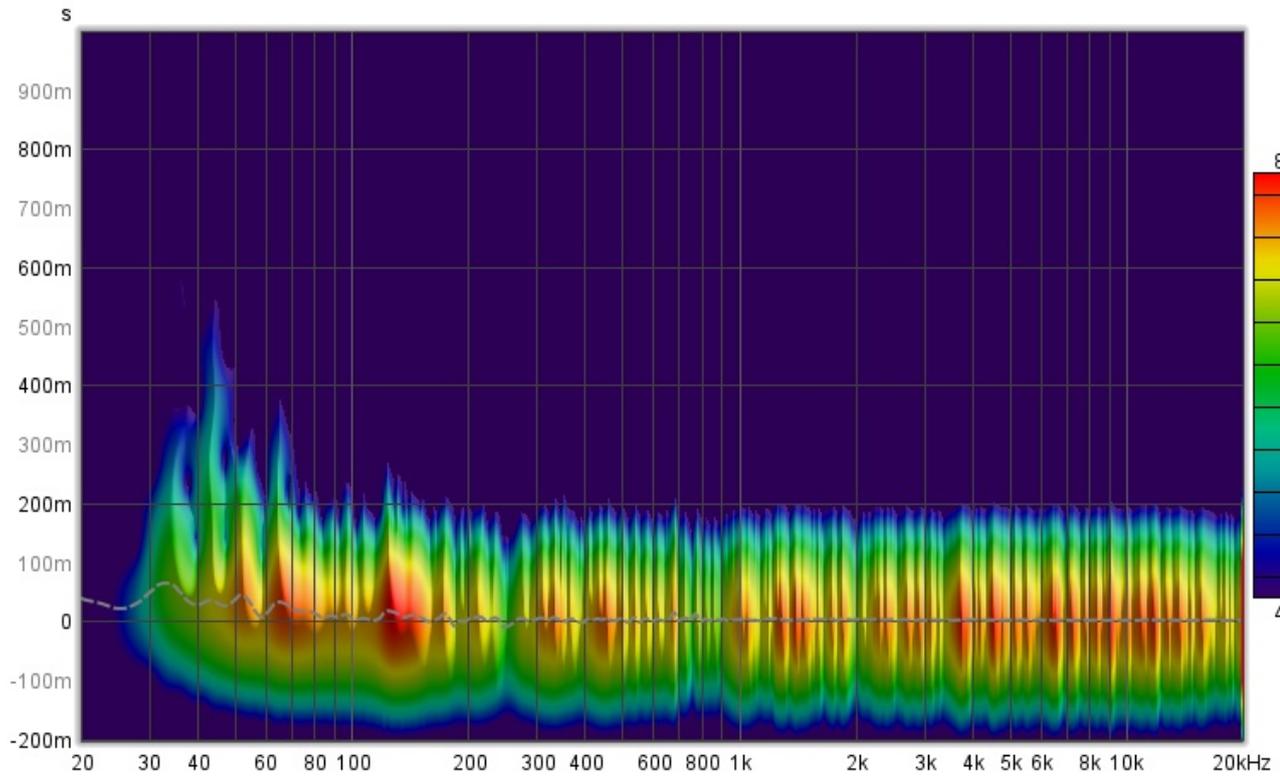

## THD+N

- : THD
- :

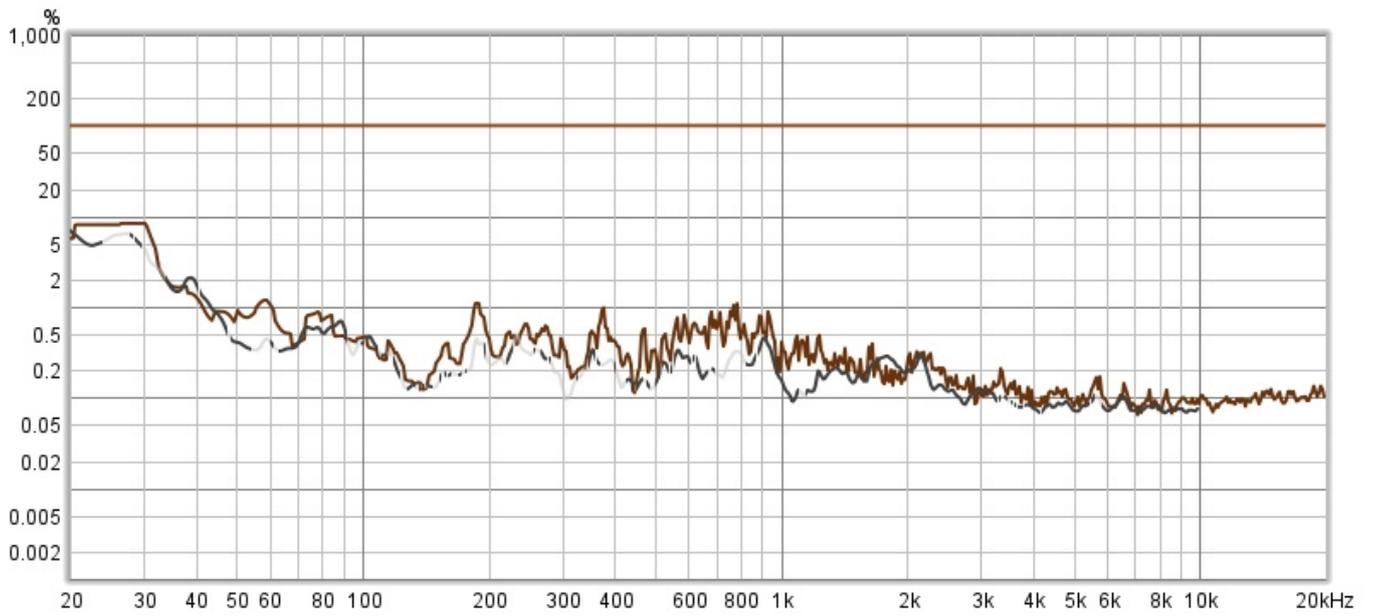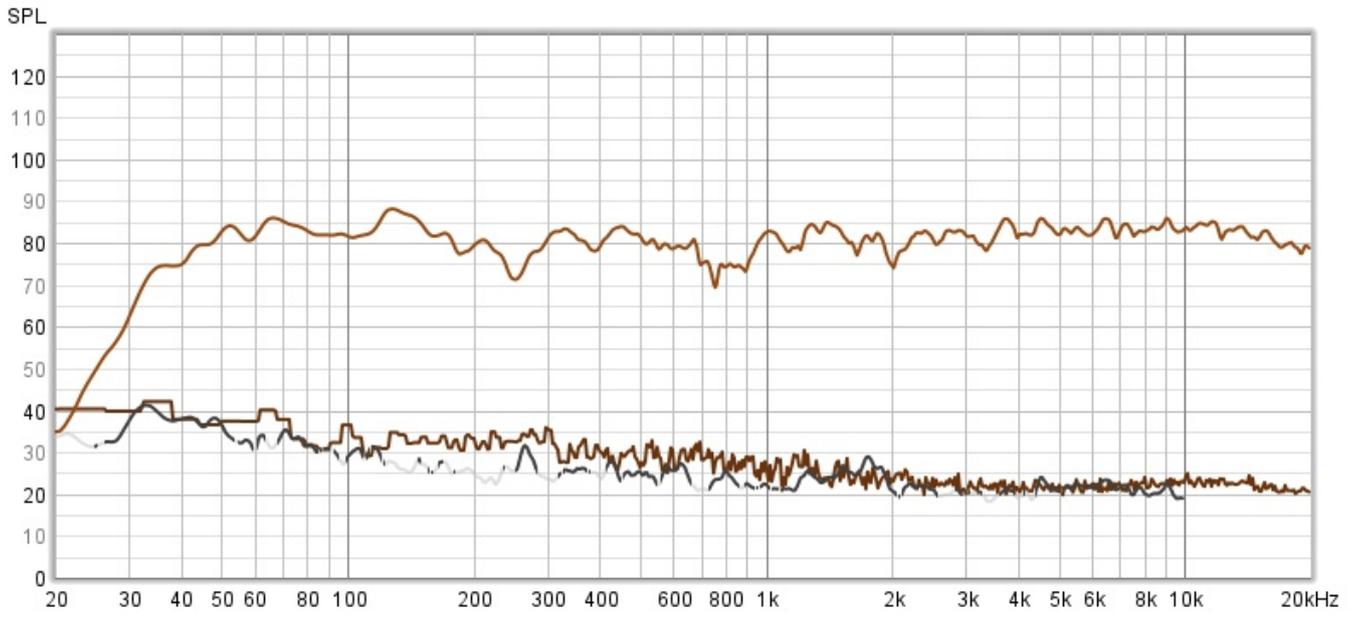

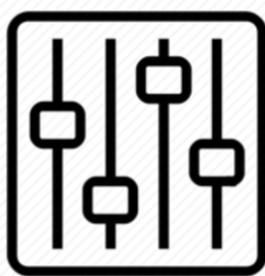

<http://wiki.homerecz.com>

From:

<https://wiki.homerecz.com/> -

Last update: **2024/04/17**

: (admin@homerecz.com)